



FB100-4A

Prime rating

Meets CPCB IV+ emission norms and noise requirements.



Engine make  **Leyland**

Genset Technical Data

Genset Rating (kVA)	100
No of Phases	3
Power Factor	0.8
Voltage (V)	415/230
Frequency (Hz)	50
Current (A)	139
Controller Type	SEDEMAC GC1206
Starting System	12V / 90 AH
Genset Weight (kg)	1650
Noise @ 75% load (dBA)	< 75 @ 1m (As per ISO 8528)
Genset Dimensions (LxWxH) (mm)	3100 x 1300 x 1600
Battery Type	Lead Acid
Circuit Breaker Rating (A)	160

Engine Technical Data

Engine Model	H4G4DE100
Engine Speed (rpm)	1500
Engine Volume (l)	4
Gross Rated Power (kW/hp)	92/122
No. of cylinder	6
Bore (mm)	104
Stroke (mm)	118
Compression Ratio	16.5 : 1
Aspiration	TA
Cooling System	Liquid Cooled
Cooling System Capacity (l)	22.5
Governing	Electronic A0

Alternator Technical Data

Alternator Make	Leroy Somer
No of Bearings	1
Alternator model	LSAP 44.3 C
Alternator rating	100
Class of insulation	H
Coupling details	SAE 3/10
Voltage Variation (%)	1
Rated Full Load Current (A)	140

Fuel & Oil Systems Technical Data

Fuel System	CRS
Type Of Fuel	Diesel
Genset Fuel Tank Capacity (l)	250
Fuel Consumption - @ 75% Load (l/hr)*	17
Lube Oil change period (hrs)	750 Hrs. or 1 Year
Oil Type	10W30 CK4
Oil Capacity (l)	12
Oil Consumption @100% load	< 0.1% of FC

Ratings in accordance with ISO 8528, ISO 3046, BS 5514 under standard reference conditions.

* With Diesel specific gravity of 0.8355 at NTP and tolerance of +5%



Standard Reference Conditions: 27 degC Air inlet temp., 100kpa (750mm of Hg) atmospheric conditions

Data is subject to modification based on final CPCB certification

Supplied to you by FW Power Generators Limited

+44 1829 863497 | sales@fwpower.co.uk | www.fwpower.co.uk

FB100-4A

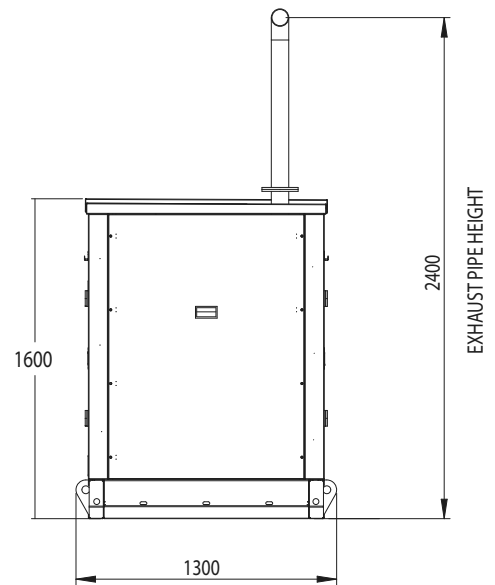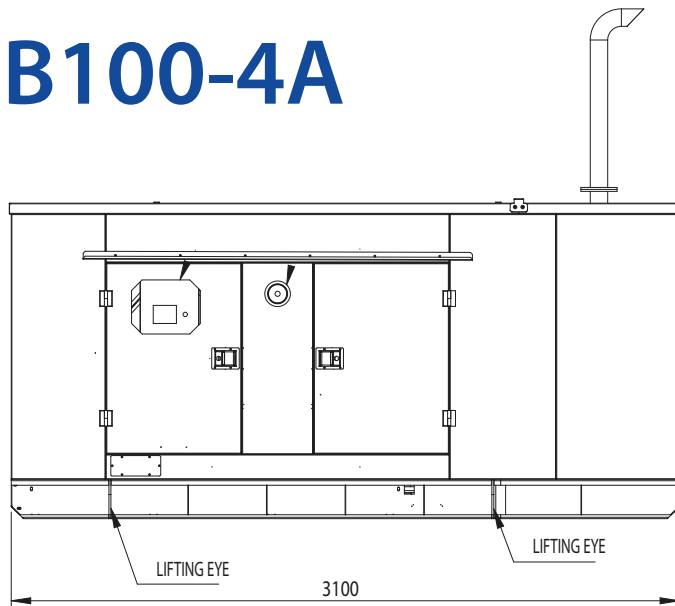

FG Wilson diesel generating sets are manufactured by Caterpillar (NI) Limited.
Specifications are subject to change without notice.

FB100-4A/0624/EN

Supplied to you by FW Power Generators Limited

+44 1829 863497 | sales@fwpower.co.uk | www.fwpower.co.uk