



FB160-4A

Prime rating

Meets CPCB IV+ emission norms and noise requirements.





Engine make  **Leyland**

Genset Technical Data		Alternator Technical Data	
Genset Rating (kVA)	160	Alternator Make	Leroy Somer
No of Phases	3	No of Bearings	1
Power Factor	0.8	Alternator model	LSAP 44.3 H
Voltage (V)	415/230	Alternator rating	160
Frequency (Hz)	50	Class of insulation	H
Current (A)	222	Coupling details	SAE 2/11.5
Controller Type	SEDEMAC GC1206	Voltage Variation (%)	1
Starting System	12V / 120 AH	Rated Full Load Current (A)	224
Genset Weight (kg)	2250	Fuel & Oil Systems Technical Data	
Noise @ 75% load (dBA)	< 75 @ 1m (As per ISO 8528)	Fuel System	CRS
Genset Dimensions (LxWxH) (mm)	3900 x 1400 x 1900	Type Of Fuel	Diesel
Battery Type	Lead Acid	Genset Fuel Tank Capacity (l)	325
Circuit Breaker Rating (A)	250	Fuel Consumption - @ 75% Load (l/hr)*	27.5
Engine Technical Data		Lube Oil change period (hrs)	750 Hrs. or 1 Year
Engine Model	H6G4DE160	Oil Type	10W30 CK4
Engine Speed (rpm)	1500	Oil Capacity (l)	18
Engine Volume (l)	6	Oil Consumption @100% load	< 0.1% of FC
Rated Power (kW)	147/197		
No. of cylinder	6		
Bore (mm)	104		
Stroke (mm)	118		
Compression Ratio	16.5 : 1		
Aspiration	TA		
Cooling System	Liquid Cooled		
Cooling System Capacity (l)	23		
Governing	Electronic A0		

Ratings in accordance with ISO 8528, ISO 3046, BS 5514 under standard reference conditions
* With Diesel specific gravity of 0.8355 at NTP and tolerance of +5%
Standard Reference Conditions: 27 degC Air inlet temp., 100kpa(750mm of Hg) atmospheric conditions
Meets CPCB IV+ emission norms and noise requirements.

FB160-4A

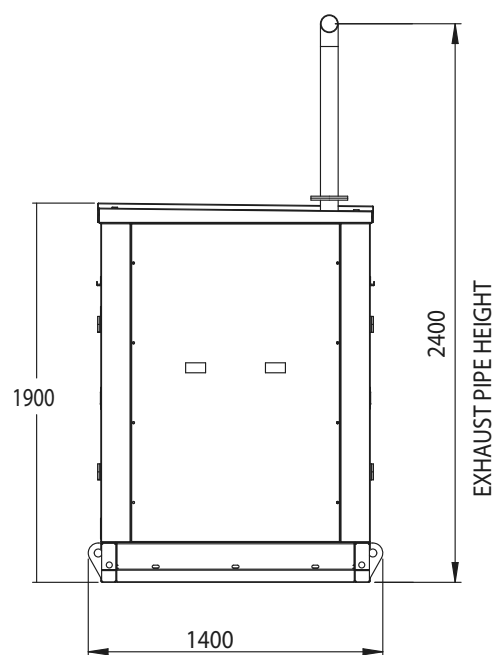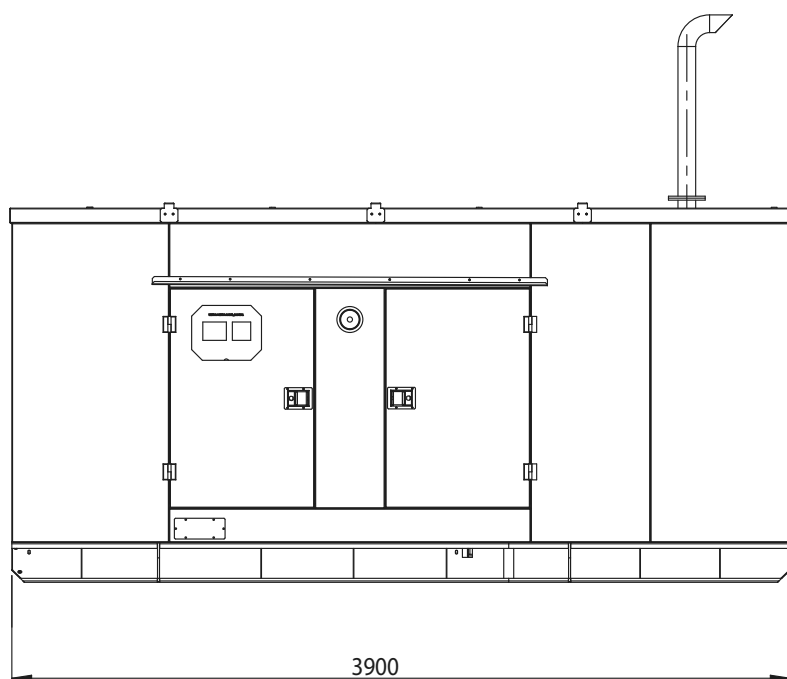

FG Wilson diesel generating sets are manufactured by Caterpillar (NI) Limited.
Specifications are subject to change without notice.

FB160-4A/0624/EN

Supplied to you by FW Power Generators Limited

+44 1829 863497 | sales@fwpower.co.uk | www.fwpower.co.uk